


Viscobille™ V2T

Rapid measurement of lubricants viscosity & Measurement of the dilution of lubricating oils by fuel oils

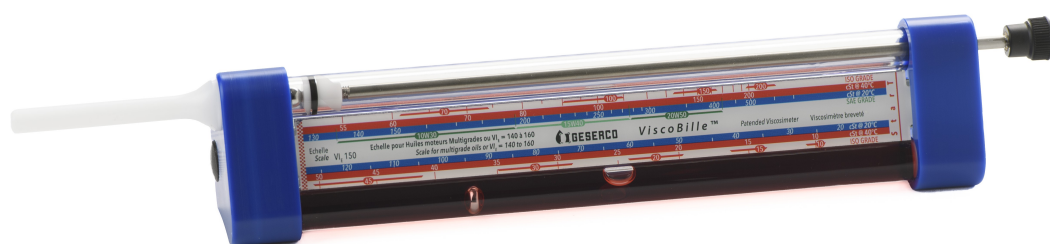

Industries concerned

- Automotive
- Rail
- Marine
- Navy
- Cement plant
- Steel industry, machining
- Power production
- Mine
- Construction
- Aerospace
- Defence
- Education
- Paper mill
- Agro-Industry
- Oil and Gas
- Chemistry
- Industry
- Analysis service

The new and improved Viscobille™ V2T viscometers by GESERCO give simple, rapid, accurate

and cost effective measurement of the viscosity of lubricating and hydraulic oils.

The viscosity measurement is direct and easy to make as it does not require using any stop watch nor thermometer, nor thermostatic bath nor complex calculations.

The GESERCO Viscobille™ V2T is a light and rugged instrument which can be operated in the field by any non-specialized personnel.

Testing black oils made easy:

The new and improved Viscobille™ have a built-in LED illuminator* that lights up the test tubes making the measuring balls easy to view with black oils even when they are heavily loaded with pollutants.

(*option)

Features

The Viscobille™ V2T measuring scales provide direct and instant reading of four test results without using any thermometer, stop watch or complex calculation:

- cSt @ 40°C
- cSt @ 20°C
- ISO grade
- SAE grade

Other functions :

- Dilution: Viscobille™ V2T allows for the measurement of the dilution level of the engine lubricating oils with fuel oils up to 14%.
- Viscosity Index calculation
- Determination of the viscosity at 100 °C or any other reference temperature.

Product code

Product Code	Type	Application	LED	cSt @ 20°C	cSt @ 40°C
VT9011	V2T	VI100 oils	√	30 – 100	10 – 400
VT9012					
VT9013	V2T	VI150 oils	√	20 – 500	10 – 200
VT9014					
VT9211	Storage Cabinet				