


ViscoTest™

Viscosity comparison and dilution monitoring of lubricating oil by fuel oil

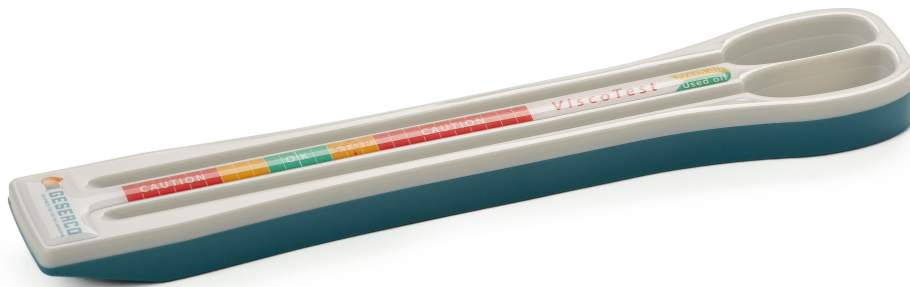

Industries concerned

- Marine
- Navy

The new and improved GESERCO ViscoTest™ allows for the comparison of 2 viscosities in a simpler, faster and cost effective way.

Viscosity comparison is now direct and easy, without any requirement for a temperature controlled bath, a thermometer, a stop watch or complex calculations.

A common application of the GESERCO ViscoTest™ is the monitoring of the dilution level of motor lubricating oils with fuel oil.

GESERCO ViscoTest™ is light and rugged, ready for field operation by any personnel, even if they are not a specialist, for monitoring the conformity of the tested liquid to specifications.

Features

The GESERCO ViscoTest™ allows for the simple and rapid comparison of the viscosity of 2 liquids.

A typical application is to compare a sample of used oil against the same fresh oil and determine if the used

oil viscosity is still within acceptable limits.

The color scale makes the comparison very easy.

The strong polyamide body of the ViscoTest™ is very resistant to shocks and chemical etching. Its handy design makes it **very easy to clean and to maintain**.

Product code

Product Code	Description
VT9004	ViscoTest™
VT9211	Storage Cabinet